

MS7000T-TMB Series



Smart IP Thermal Measure Bullet Camera



Key Features

- Uncooled IRFPA Microbolometer
- Temperature detection
- Effective resolution 396x264
- Sensitivity 50mK
- 8/15/25/35/50mm lens optional
- Infrared detection wavelength 8-14um
- Support 8 area temperature Detection
- Support 17 Polarity Control
- Support DVE image Enhance
- Standalone Operating

Dimensions

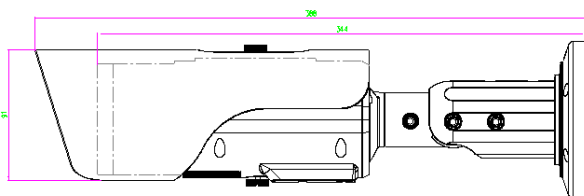

CAMERA	
Detector Type	Long-Life,Uncooled IRFPA Microbolometer
Effective Resolution	396x264
Pixel Pitch	20μm
Sensitivity	50mK
Spectral Range	8 to 14μm
Temperature Response	30ms
Lens	F1.0, 08mm,15mm,25mm,35mm,50mm optional
Focus	Manual
FOV(Fixed Lens)	43.6°×36.4°/24°×18°/14.6°×11°/10.5°×7.8°/7.3°×5.5°
Temperature Detect	160m(Lens:8mm) / 300m(Lens:15mm) / 500m(Lens:25mm) /
Distance(Fire)	1000m(Lens:35mm) / 1500m(Lens:50mm)
Recognition Distance	(Body) 100/200/300/450/650m (Vehicle) 200/350/600/850/1200m
Measuring Range	-10°C ~ 200°C
IMAGE	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	500kb-4Mb
Audio Compression	G.711,RAW_PCM,NONE
Max.Resolution	D1/30fps
Stream	D1/CIF
Image Color Mode	Black-Heat /White-Heat/Rainbow/Iron-Red up to 17 modes
DVE Image Enhance	Yes
3D Noise Reduce	Yes
Image Correction	Auto/Manual/External
Image Overturn	Horizontal /Vertical /Horizontal+Vertical/
NETWORK	
Network Protocols	IPv4/V6,RTSP/RTP/RTCP,TCP/UDP,HTTP,DHCP,DNS,FTP,DDNS,PPPOE,SMTP,SIP
Alarm Trigger	Temperature Alarm, MotionDetection, Networkdisconnect, Diskalarm, I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware WatchDog
Web Language	English, Chinese
System Compatibility	Onvif
INTERFACE	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	1ch Audio In,1ch Audio Out
Alarm I/O	2ch Alarm In,2ch Alarm Out
RS485	Yes
BNC Output	Yes
Reset Button	Yes
Edge Storage	Micro SD/SDHC slot, Max 32GB
GENERAL	
Power Supply	DC12V/POE
Power Consumption	5W(MAX)
Operating Temperature	-10°C ~ 50°C (14°F ~ 122°F)
Ingress Protection	IP66
Approvals	CE / FCC
Product Dimensions	φ110×388mm
Product Weight	1900g

The latest product information / specification can be found at <http://www.movisight.com/>

